

HUNTONIT

PREPAINTED WALLS AND CEILINGS

B24 06.26

NEW COLORS AND SURFACES FOR YOUR INSPIRATION



THE NORWEGIAN
ASTHMA AND ALLERGY
ASSOCIATION
— maten og miljøet —

member of

BYGGMA
group

WWW.HUNTONIT.COM



PRODUCT FACT

- Huntonit pre-painted wall and ceiling panels are produced in Norway with nothing but pure natural wood fibers. The fibers are compressed and fused together in a heat and wather process.
- The panels are treated with five coats of environmentally friendly waterbased acrylic paint. Finishing layer is a protective coating.
- The panel has fire- (D-s2,d0). Technically approved by SINTEF and may be used in REI30- and REI60- structures.
- The panels are dense, making it possible to install screw fixed bookshelves and lamps directly on to the panels.
- Recommended by the Norwegian Asthma and Allergy Association (NAAF).
- Holds the Danish Indoor Climate Label and M1.

Single Panel board White - used in a cabin



BRUSH PAINTED

SINGLE PANEL BOARD

Single panel board with brush painted surface and wood structure. May be used horizontally or vertically onto ceiling or the wall.

Short side extension with V-fas provide a clean appearance where panels need to be spliced, maximum coverage beyond 2400 mm.



LONG SIDE EXTENSION
IN SKYGGE PROFILE



SHORT SIDE EXTENSION
IN SKYGGE PROFILE

PRODUCT	GROSS SIZE MM	PROD.NR
Hvit, brush painted	11 x 142 x 2420	231696
Hvit, brush painted	11 x 142 x 3020	231628
Hvit, brush painted	11 x 142 x 3620	231666
Hvit, brush painted	11 x 200 x 2420	231621
Hvit, brush painted	11 x 200 x 3020	231623
Brilliant Hvit, brush painted	11 x 142 x 2420	231692
Brilliant Hvit, brush painted	11 x 142 x 3020	231638
Brilliant Hvit, brush painted	11 x 200 x 2420	231651
Net measurements must be used when calculating consumption – 20 mm less than gross		

PAINTED CEILING PANEL

LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE




PRODUCT	GROSS SIZE MM	PROD.NR
Brilliant Hvit, brush painted	11 x 300 x 1220	231376
Brilliant Hvit, brush painted	11 x 620 x 1220	231380
Classique painted	11 x 300 x 1220	231201
Classique painted	11 x 300 x 1820	231101
Classique painted	11 x 620 x 1220	231002
Symfoni Brilliant Hvit, painted	11 x 300 x 1220	231506
Symfoni Hvit	11 x 300 x 1820	231511
Plankett painted	11 x 300 x 1220	231406
Plankett painted	11 x 300 x 1820	231408
Net measurements must be used when calculating consumption – 20 mm less than gross		




Classique ceiling


Brilliant Hvit and Mikrofuge Wall panel

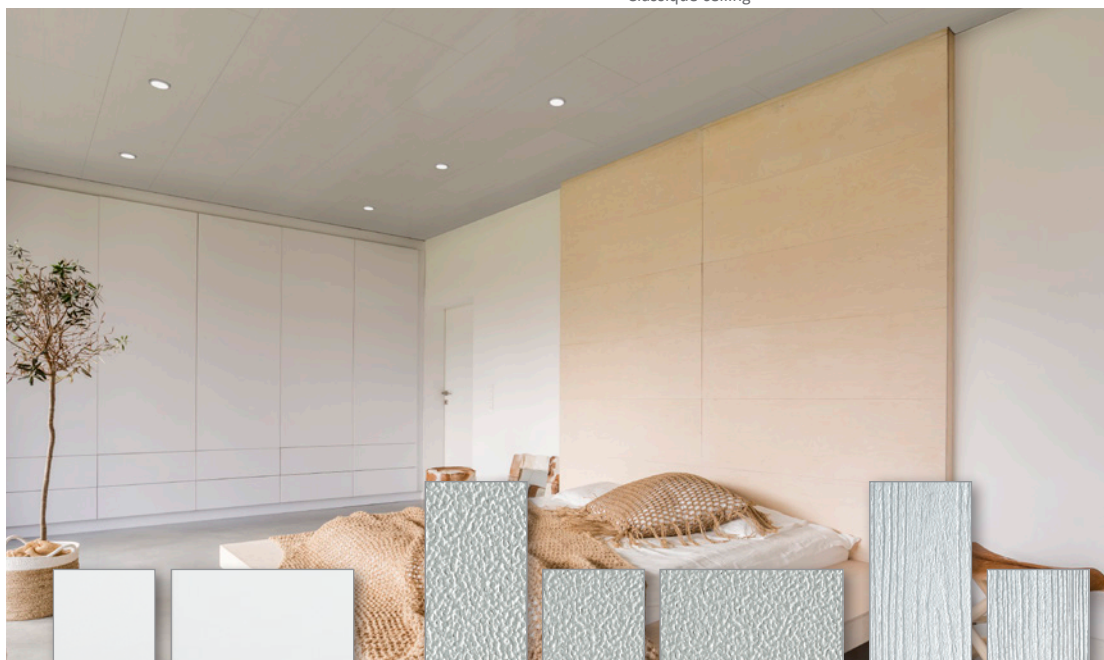

Symfoni ceiling



Hvit
Brilliant

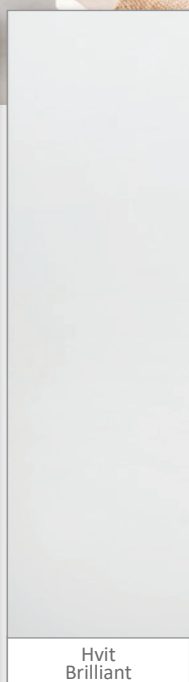

Hvit
Brilliant



Hvit
Classique



Hvit
Classique



Hvit
Classique



Hvit
Symfoni



Hvit
Symfoni



Hvit
Plankett



Hvit
Plankett

NCS CODES:

Brilliant Hvit
NCS S 0500-N

Hvit
NCS S 0502-Y



Rustikk Saltdal

RUSTIKK SINGLE PANEL BOARD

Huntonit single panel board Rustikk has a wood structured surface. Available in 5 colours.

The panels have a natural variation in color and structure which helps to give the wall a natural apperance.

LONG SIDE EXTENSION
IN RUSTIKK PROFILE



SHORT SIDE EXTENSION
IN RUSTIKK PROFILE



Rustikk Svalbard



Rustikk Færder

COLOR	GROSS SIZE MM	PROD. NR
Lindesnes	11 x 142 x 2420	231533
Færder	11 x 142 x 2420	231536
Lillesand	11 x 142 x 2420	231537
Saltdal	11 x 142 x 2420	231539
Svalbard	11 x 142 x 2420	231538
Net measurements must be used when calculating consumption – 20 mm less than gross		

colors
available
in Rustikk




Lindesnes




Færder



Lillesand



Saltdal



Svalbard

OBS: pictures may differ from real life product. Please see sample at your dealer.
The design illustrations show 4 tables assembled - corresponding a panel size of 50x56 cm.

BRUSH PAINTED

SKYGGE WALL PANEL

Huntonit brush painted wallpanel in Skygge profile is suitable for anyone who wants an classical and timeless look.


Beautiful brush painted surface, light colors and the natural wood fiber core makes Skygge panel a choice for the future. Available in 2 pack for your convenience.

The panel have five boards, each 120 mm wide. Tongue and groove allows quick and easy installation with concealed nailing. Mount on existing wall or directly on to stud.


PRODUCT	GROSS SIZE MM	PROD.NR
Brilliant Hvit	11 x 620 x 2390	233801
Hvit	11 x 620 x 2390	231850
Hvit	11 x 620 x 2740	231860
Hvit	11 x 620 x 3050	231880
Caffelatte	11 x 620 x 2390	231852
Frost	11 x 620 x 2390	231855
Frost	11 x 620 x 2740	231865
Mist	11 x 620 x 2390	233235
Sand	11 x 620 x 2390	233233
Earth	11 x 620 x 2390	233221
Soft Menthol	11 x 620 x 2390	233241
Soft Eucalyptus	11 x 620 x 2390	233243
Deep Ocean	11 x 620 x 2390	233245
Pepper	11 x 620 x 2390	231887
Kveldshimmel	11 x 620 x 2390	231837

Net measurements must be used when calculating consumption – 20 mm less than gross


SKYGGE PROFILE




Brilliant Hvit
S0500-N




Hvit
S0502-Y



Caffelatte
S1005-Y30R



Frost
S1500-N



Sand
S2502-Y




Skygge Earth


Skygge Deep Ocean




Skygge Mist




Earth
S4005-Y20R




Pepper
S6502-R




Kveldhimmel
S5010-R90B




Mist
S3000-N



Soft Menthol
S1706-G15Y




Soft Eucalyptus
S5608-B78G

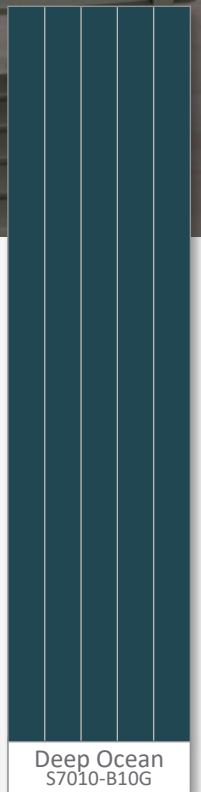

Deep Ocean
S7010-B10G


Huntonit Perle Hvit

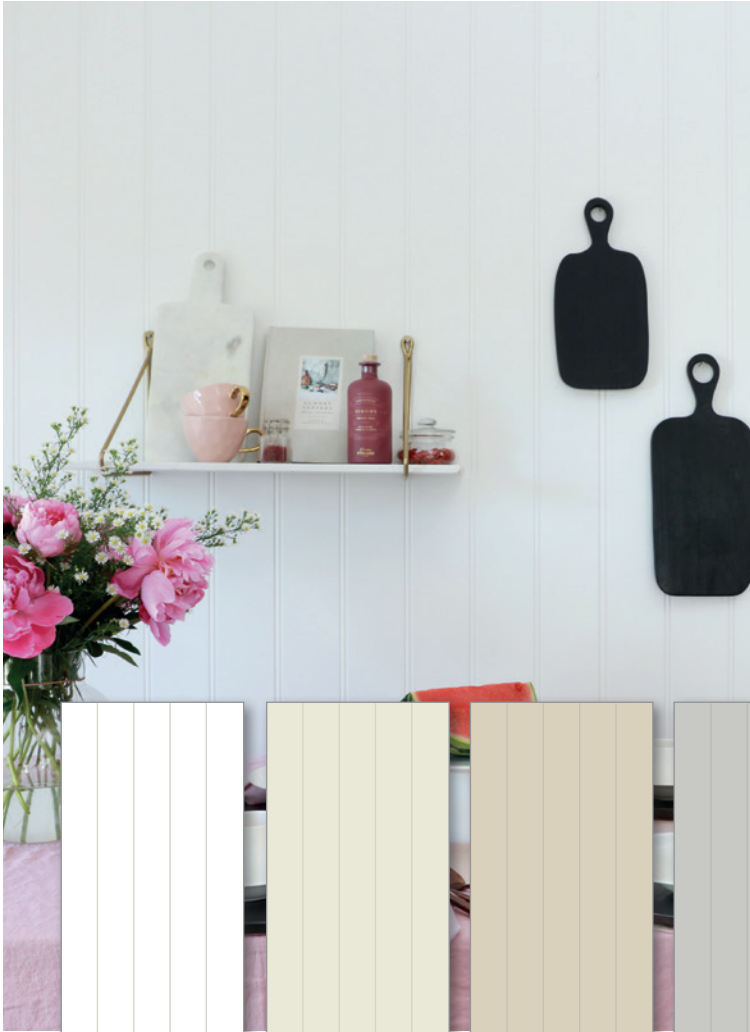

Huntonit Perle Brilliant Hvit



*Colors
available
in Perle*

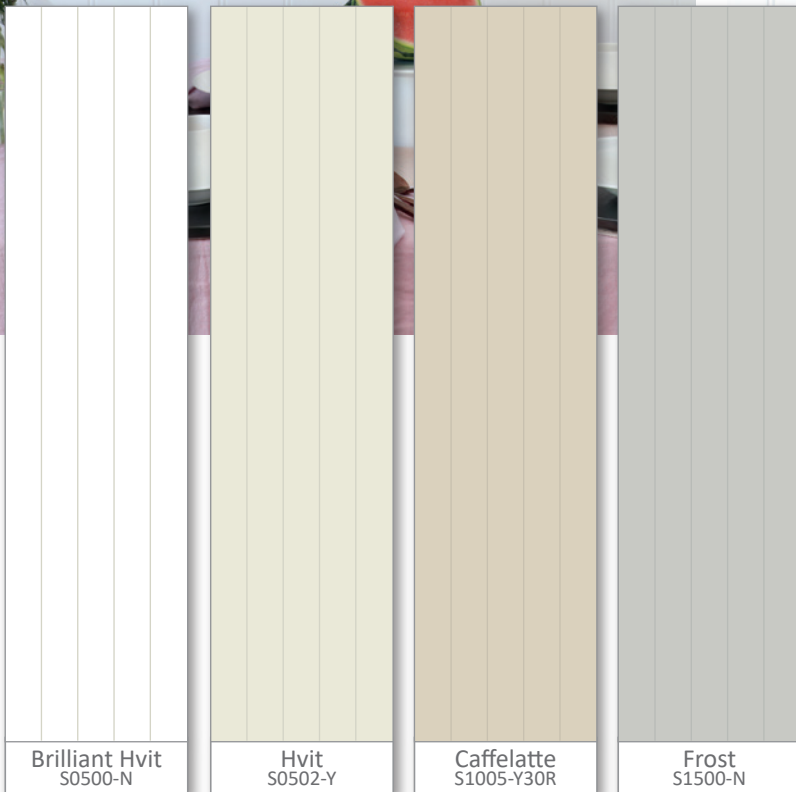



BRUSH PAINTED

PERLE WALL PANEL

Huntonit pre painted panels with Perle profile;
a classic and elegant apperanse for your walls.

Brush painted surface with light and timeless colors.

The panel consist of 5 boards; each 120 mm wide. The panel has tongue and groove and is very easy and quick to install with concealed nailing, either on an existing wall or directly on to stud. Huntonit wallpanel with smooth prepainted surface is durable and easy to clean.

PERLE PROFILE



PRODUCT	GROSS SIZE MM	PROD.NR
BASIC		
Brilliant Hvit	11 x 620 x 2390	233701
Hvit	11 x 620 x 2390	231750
Hvit*	11 x 620 x 2740	231760
Caffelatte	11 x 620 x 2390	231752
Frost	11 x 620 x 2390	231755
*must be ordered		
Net measurements must be used when calculating consumption – 20 mm less than gross		



Faspanel 3 bord Hvit



PRE PAINTED

FASANEL 3 BORD

Huntonit brush painted Faspanel 3 bord consist of three boards. The panel has tongue and groove and is very easy and quick to install with concealed nailing, either on an existing wall or directly on to stud.

Delivered in 2 pack.

V-FAS PROFILE



PRODUCT	GROSS SIZE MM	PROD.NR
BASIC		
Hvit	11 x 620 x 2390	243399
Hvit*	11 x 620 x 2740	243369
Earth	11 x 620 x 2390	233261
Earth	11 x 620 x 2740	233262
Hvit roll painted	11 x 620 x 2390	243301
Hvit roll painted*	11 x 620 x 2740	243311
*must be ordered		
Net measurements must be used when calculating consumption – 20 mm less than gross		

Hvit
S0502-Y

Earth
S4005-Y20R

PRE PAINTED

FASPANEL 6 BORD

Huntonit pre painted wall panel in Faspanel 6 bord with brush painted surface has a nostalgic and elegant look.

Available in 2 pack for your convenience.

The panel consist of 6 bord, each 100 mm wide. The panel has tongue and groove and is very easy and quick to install with concealed nailing, either on an existing wall or directly on to stud.


The smooth surface on the Faspanel 6 bord do not collect to much dust and is easy to clean.

V-FAS PROFILE




PRODUCT	GROSS SIZE MM	PROD.NR
Hvit	11 x 620 x 2390	233450
Hvit*	11 x 620 x 2740	233460
Mist	11 x 620 x 2390	233453
Mist*	11 x 620 x 2740	233457
Alladin	11 x 620 x 2390	233431
Pilasterblå	11 x 620 x 2390	233433
Kveldshimmel	11 x 620 x 2390	233437
Dempet sort	11 x 620 x 2390	233435
*must be ordered		
Net measurements must be used when calculating consumption – 20 mm less than gross		


Faspanel 6 bord Mist

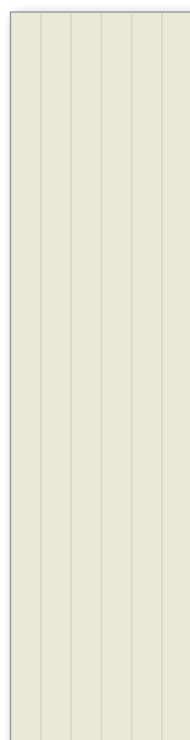


Hvit
S0502-Y

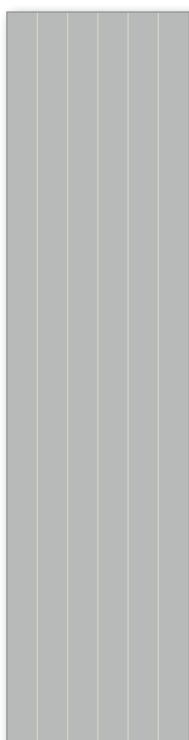

Mist
S3000-N

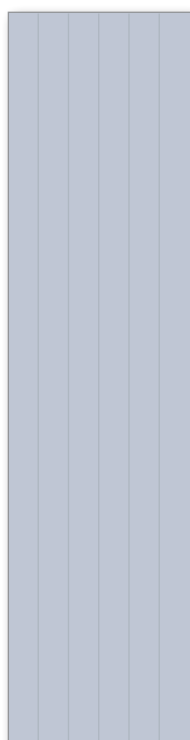


Alladin
S1510-R80B

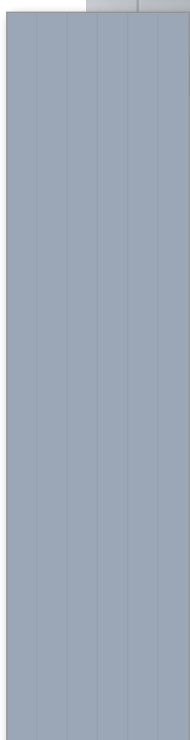

Pilasterblå
S3010-R90B



Kveldshimmel
S5010-R90B

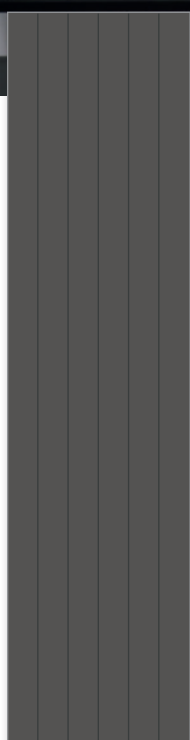

Dempet sort
S8500-N





BRUSH PAINTED MIKROFUGE

Huntonit Mikrofuge are brush-painted wall panels with a discreet joint and without milled boards. The micro-joint gives the panel a minimal joint and the surface is strong and brush-painted.

MIKROFUGE PROFILE



PRODUCT	GROSS SIZE MM	PROD.NR
Hvit	11 x 620 x 2390	233150
Hvit	11 x 620 x 2740	233151
Hvit*	11 x 620 x 3050	233147
Brilliant Hvit	11 x 620 x 2390	233156
Brilliant Hvit*	11 x 620 x 2740	233157
Frost	11 x 620 x 2390	233154
Frost*	11 x 620 x 2740	233155
Mist	11 x 620 x 2390	233158
Mist*	11 x 620 x 2740	233159
Mist*	11 x 620 x 3050	233152
Earth	11 x 620 x 2390	233172
Earth*	11 x 620 x 2740	233173
Sand	11 x 620 x 2390	233176
Sand*	11 x 620 x 2740	233177

*must be ordered

Net measurements a be used when calculating consumption – 20 mm less than gross








Pro Wall painted with Spring Breeze

HUNTONIT
PRO WALL

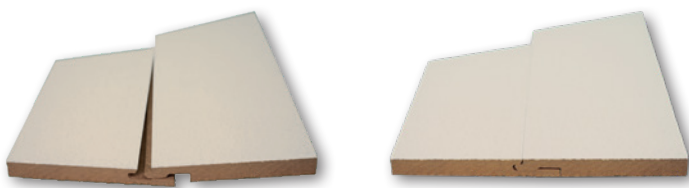

SMOOTHEST WALL EVER **PRO WALL**

Wood-based wall panel for a strong, smooth interior wall.

Panel with click-joint that does not require filler or primer. The wall panel is cured with water based eco friendly primer. Ready to be painted with your favorite color immediately after installation. Pro Wall are also suitable for wallpapering.

Huntonit Pro Wall can be used when you want a interior without skirting boards. The boards are both impact and screw-resistant, which makes it possible to install bookshelves and lamps directly in to the boards.

See separate brochure or www.huntonit.com

PROFILE



PRODUCT	GROSS SIZE MM	PROD.NR
Primed white	11 x 620 x 2420	280010
Primed white	11 x 620 x 2500	280050
Primed white	11 x 620 x 2800	280080
Primed white*	11 x 620 x 3050	280090
*must be ordered		
Net measurements must be used when calculating consumption – 20 mm less than gross		



smartpanel

TREND WALL PANEL

Trend is pre-painted wall panels for those who want a minimalistic and smooth look.


Smartpanel Trend is easily mounted on existing walls or studs. The locking system gives you concealed mounting so that you cannot see the fixing materials. Whether you are building a new house or renovating, the panels are easy to handle and quick to install. Make sure to click all the way into place so the joint will be discreet and neat.






Gloss level 12-15.

TREND PROFILE



PRODUCT	GROSS SIZE MM	PROD.NR
Sand	11 x 620 x 2390	263210
Sand	11 x 620 x 3050	263220
Skoggrønn	11 x 620 x 2390	263212
Paulus Blå	11 x 620 x 2390	263214
Bomull (white)	11 x 620 x 2390	263250
Bomull (white)	11 x 620 x 3050	263280
Organic Red	11 x 620 x 2390	263216
Betong	11 x 620 x 2390	263249
Brilliant Hvit	11 x 620 x 2390	263245
Net measurements must be used when calculating consumption – 20 mm less than gross		

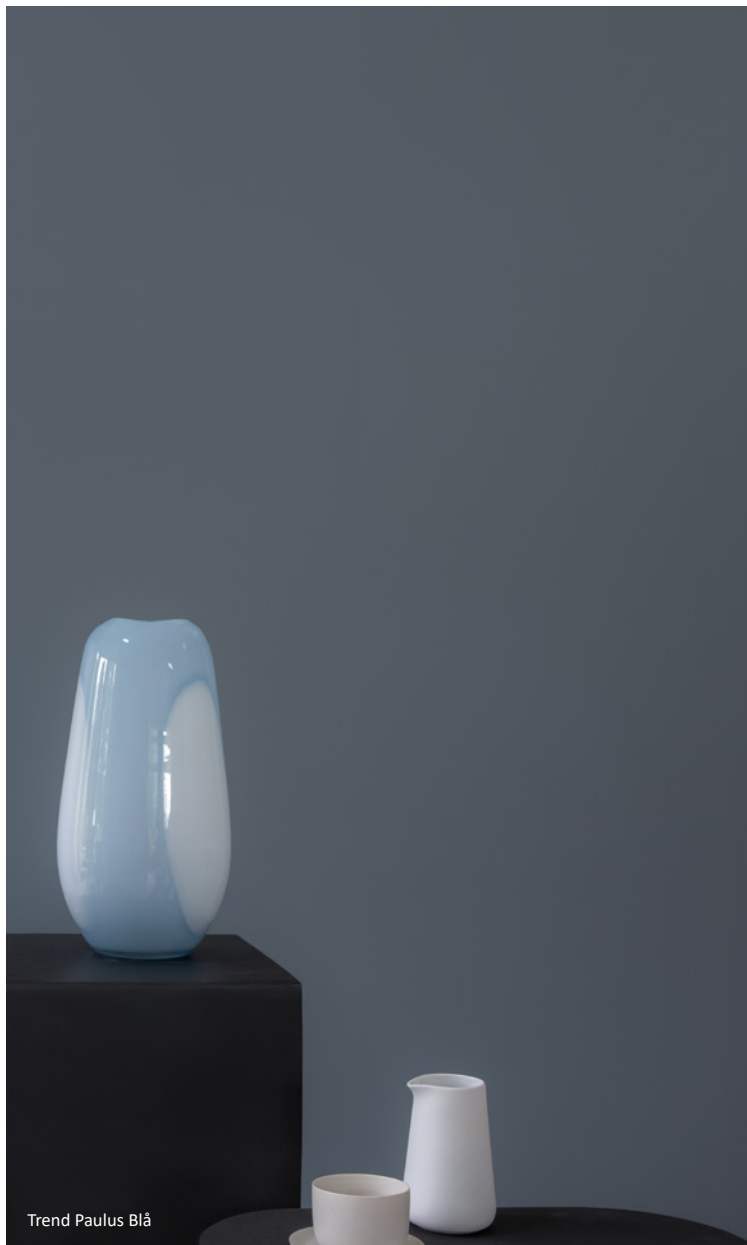

						
Sand S2502-Y	Skoggrønn S5010-G30Y	Paulus Blå S6108-B08G	Organic Red 4915-Y55R	Bomull S0502-Y	Betong S2500-N	Brilliant Hvit S0500-N





PAINTED BRANNIT

Fire-resistant ceiling and wall panel.

Tested by SINTEF - Norway's Fire Research laboratory testify that Huntonit Brannit meets the requirements for level K10 - B-s1,d0 - according NS-EN 13986-2004.

Huntonit Brannit prepainted panels provides shorter construction times and improved overall economy. Huntonit Brannit wall- and ceiling panel are easy to work with and has a tongue and groove on two sides. Ceilings are delivered with tongue and groove on all four sides. The panels are treated with flame retardants paint. Delivered in 4 pack.

PRODUCT	GROSS SIZE MM	PROD.NR
Brannit Ceiling White	11 x 620 x 1220	233081
Brannit Wall White	11 x 620 x 2390	233021
Brannit Wall White*	11 x 620 x 2740	233023

*must be ordered

Net measurements must be used when calculating consumption – 20 mm less than gross

MAINTENANCE

To maintain fire classification B-s1,d0, repaint Huntonit Brannit panel with Palett. Palett Paint may be obtained in all NCS codes and gives great freedom of choice when it comes to renovation and maintenance of the installed Huntonit Brannit panel. Palett maintenance system is tested by SINTEF.

Contact us for further information.






Brannit product description shows close look of Brannit surface structure.


PRE PAINTED PANEL BOARD INSTALLATION

Before installation: check the panel for any damage or difference in color.

Huntonit is a natural product made of wood fiber pulp; variation in color and appearance may occur. It is recommended to use panel from the same production or batch number.






1. Distribute the panel so that first and last panel become equally wide.
2. If the panel are to be mounted upright, the wall must be leaked out with horizontal battens at c/c 600 mm.





- 3/4. Fit blocks in inside and outside corners.



3. Mount across electric beams/beams with a max distance c/c 60 cm. When mounting on existing roof; test if the material has the strength to fix the screws. If not; locate the beams and fix the screws to them.
4. Cut to the first panel according to the correct width. When cutting with circular saw, the painted side should face down.



5. The first panel is cut and mounted at a distance of 10 mm from the floor and ceiling.
6. Use a leveler so the installation gets a right start.




7. The panel is to be spliced at the beam and should not be glued.
7. First panel on a new wall should be glued with Casco superfix or PL 400.
8. Double screw on each leak/beam.



9. Use correction paint delivered in 20 ml to cover marks made by screws and nails.
10. For external and internal corners; use Huntonit's corner profile.

8. Mount the rest of the panel.
Your new ceiling is done!


You may mount recessed down lights in all our ceiling panels. You can also install our panels in wet rooms, provided normal ceiling height and good ventilation is available.



11. Your walls are done!

PRE PAINTED PANEL BOARD INSTALLATION

HORIZONTAL WALL MOUNT



1. Distribute the panel so that top and bottom panel become equally wide.

2. Acclimatize the panel, in the packaging, for two days at room temperature before installation.




3. Mount across studs with a distance of max 60 cm. When mounting on existing wall; test if the material has the strength to fix the screws. If not; locate the beams and fix the screws to them.

4. Cut to the first panel according to the correct width. When cutting with a circular saw, the painted side should face down.



5. Mount the profiles of your choice.

6. Your walls are done!



! Byggma Group is working hard on quality control. Despite this quality assurance, some errors may occur. The user must check the panel before mounting - in which our liability is limited to replacement of faulty panels. The manufacturer reserves the right to alter specifications when changes and printing errors occur.

WALL AND CEILING ACCESSORIES

Huntonit pre-painted wall- and ceiling are supplied with tongue and groove for quick installation and hidden screws gives a assured result. Mount on existing wall or directly onto stud. Huntonit pre-painted wall- and roofpanel are the only pre-painted product recommended by the Norwegian Asthma and


Allergy Association. Huntonit panels are also approved with Indoor Climate Award from the Danish Technological Institute. Huntonit product is equip with M1; Emission classification of building materials, by the Building Information Foundation RTS.

 CORNER CLIPS Use this corner clip when mounting our panel and avoid visible staples in the corners. NB! Only on wooden studs, use 3 pieces per panel.	 ACRYL FILLER For sealing internal corners. 1 tube is enough for approx. 20 lm joint 3 x 3 mm. Available in different colors.	 CORRECTION PAINT Correction paint delivered in 20 ml to cover marks made by screws and nails. Available in different colors.	 MOLDING PAINT 1/2 liter paint delivered in different colors to match the color of our panels.
 FEXIBLE CORNER External and internal use. (White) Dim. 28x28x3000 mm	 EXT CORNER PROFILE For use in external corners. Length: 2700 x 28 x 28 mm. Available in different colors.	 INT CORNER PROFILE For internal corners. Length: 2700 x 12 x 12 mm. Available in different colors.	
 SCREWS Adapted to 11 mm pre-painted panel. Wall: 4,2 x 35 mm. Ceiling: 4,2 x 25 mm.	 JOINT KIT When grouting corners we offer a joint set that is perfect for this purpose.		


OTHER INSTALLATION TIPS



In the inside corner the last panel may be attach to the stud with construction adhesive. If so you do not need clips or screws. If last panel is installed against an outer wall with plastic wrap, one can not use adhesive. The panels may also be glued to brick/concrete. (see our installation instructions).



In buildings where there high demands on cleaning, eg. public buildings, institutions, etc., a base profile may be used to protect the edge of the panel. This solution is used when the panels need to be lifted off the floor (ex. 50 mm.).



Huntonit pre-painted wall- and ceiling panel are equipped with tongue and groove for quick and easy installation with concealed screws. The joints shall be glued. Screw distance: 150 mm.


PRE PAINTED WALL PANEL INSTALLATION

Before installation: check the panel for any damage or difference in color.

Huntonit is a natural product made of wood fiber pulp; variation in color and appearance may occur. It is recommended to use panel from the same production or batch number.




1) Acclimatize the panel at room temperature, for 2 days, and install immediately after the package is opened. Mount across electric beams/beams with a max distance c/c 60 cm. May also be mounted on horizontal beams (c/c 60 cm). Each mount should then be fixed with double screw set on each beam.

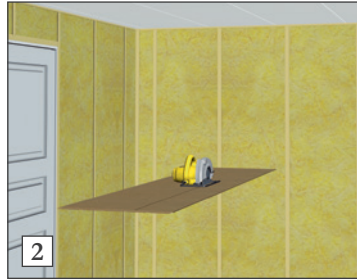

2) Cut to the first panel according to the correct width. When cutting with circular saw, the painted side should face down.




3) Use a leveler so the installation gets a right start.

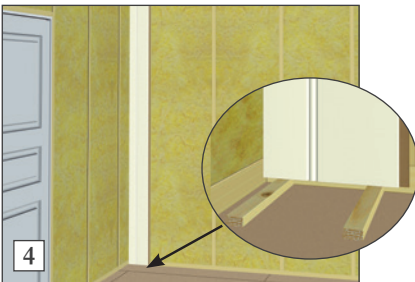


4) Mount the panel 10 mm from the floor / ceiling. Tip: Place 2 blocks under the wall plate to facilitate the installation.



5) Distance between screws; c/c 150 mm. In the first corner, the screw will be hidden by the last panel mounted.

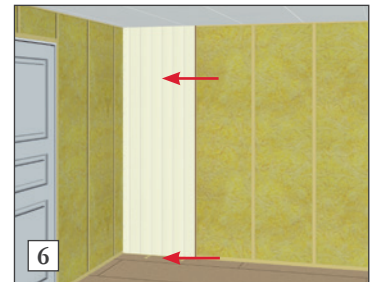


6) Do not glue the joints. Next plate is put in place. The wall plates are supplied with groove, spring and v-joint for concealed screwing.

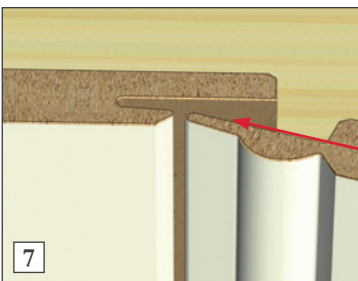

7) The spring side of the plate is inserted into the groove.




8) This provides a concealed joint that does not need to be glued.

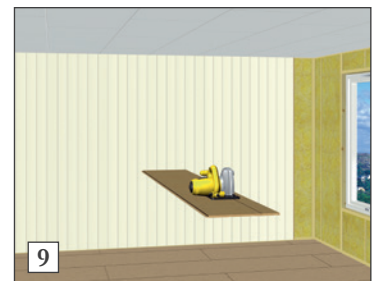

9) The last panel towards the next corner is cut. When cutting with circular saw, the painted side should face down.



10) Last panel towards the corner is screwed along the cornerside. These screws are hidden by the 1st plate on the next wall.

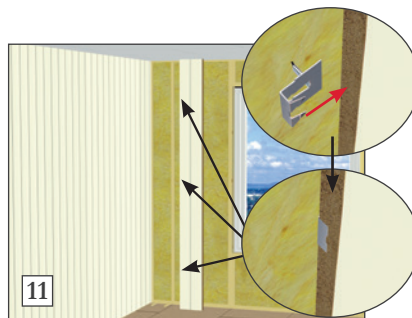


11) Cut the first plate, according to the correct width, for next wall. Corner clips are used for concealed fixing at the inside corner. Affix the corner clip completely into the plate. Use 3 corner clip alongside the panel and a screw at the top and bottom of the panel. These screws will be hidden by cornice and skirting.



12) The next first panel is placed tightly in the corner and tapped in place at each corner clip.

PRE PAINTED WALL PANEL INSTALLATION

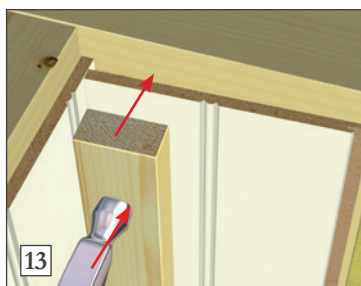

13) Protect the panel with a shim when you knock it in place.




14) Make sure the panel is completely knocked in.




15) The panel is screwed in the nail lip. In the corner, the panel is fixed with dive pins (by hand). Secure top and bottom as usual. Use correction paint (in correct colour) to cover the visible screws.




16) The rest of the panels are mounted in the same way.

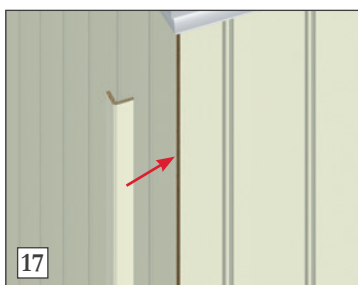


17) At external corners use the Huntonit corner profile

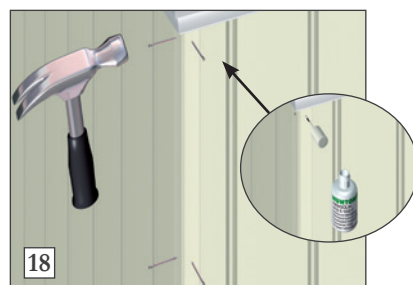


18) Staple the corner profile (c/c 300mm) and cover the staples with the correction paint. Correction paint is delivered in 20 ml to cover marks made by screws and nails. Available in different colors. To be used sparsely due to visual difference in surface structure.

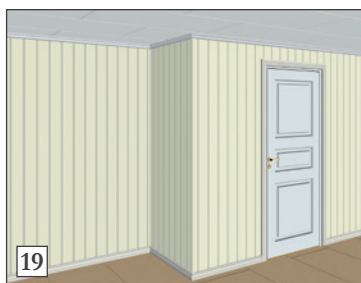

19) This provides a perfect external corner. The external corner profile may also be glued on.

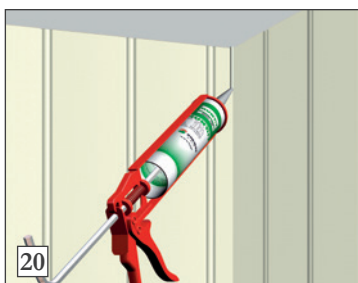

20) Huntonit also deliver Akryl Filler in original colours. To be used in internal corners.

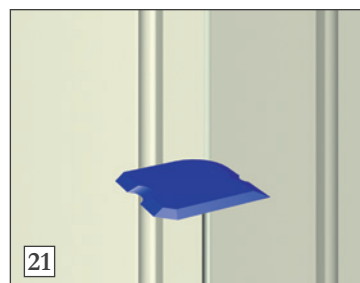

21) When akryl filler is used we recommend a joint kit that is perfect for this purpose.



22) Huntonit can provide a special profile. This is for use on windows and doors where a second board layer are mounted (renovation). Available in primed white.



23) Molding paint, 1/2 liter, is delivered in different colors to match the color of our panels.




24) Huntonit panel is available in several types and colors, and with accessories that make the job easy and give a professional result.


PRE PAINTED CEILING PANEL INSTALLATION

Before installation: check the panel for any damage or difference in color.

Huntonit is a natural product made of wood fiber pulp; variation in color and appearance may occur. It is recommended to use panel from the same production or batch number.

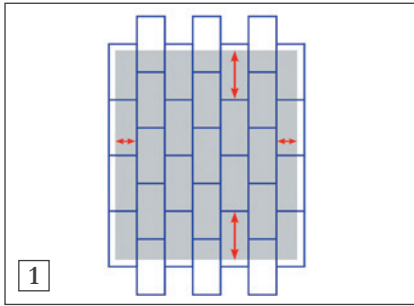

1) Acclimatize the panel at room temperature, for 2 days, and install immediately after the package is opened. A drawing is made prior to installation for calculating the consumption of roof panel.

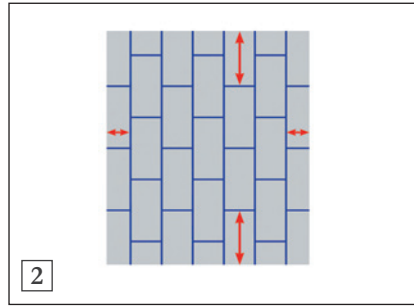

2) The principle of the drawing is to show the best solution of the pattern in the ceiling and how the panel must be adapted before mounting. Keep the distance to walls and fixed points at 7-10 mm.



3) Mount across electric beams/beams with a max distance c/c 60 cm. All panel edges without adjacent panel must be supported. When installing narrower ceiling panels, the beam distance must be adjusted to fit the width of the panel.




4) Cut to the first panel according to the drawing. When cutting with circular saw, the painted side should face down.




5) Mount the first row after string / chalk cord for a straight start. Distance to wall and between screws; c/c 150 mm. NB: mount with approximately 10 mm distance to all walls.





6) Fix the panel with screws.

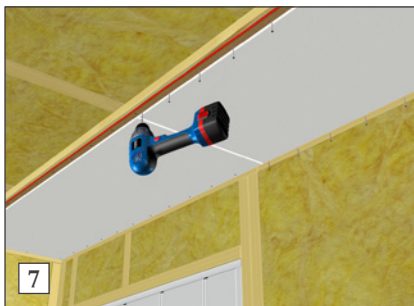

7) The panel is to be spliced at the beam and should not be glued. Distance between screws; c/c 150 mm.

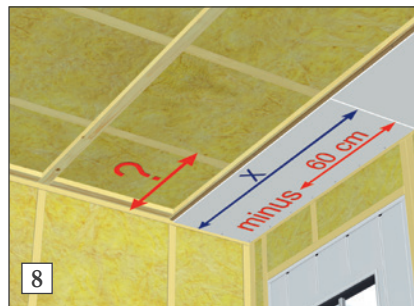

8) To find the length of the 1st panel in the second row, subtract 60 cm from the length of the 1st panel in the 1st row.

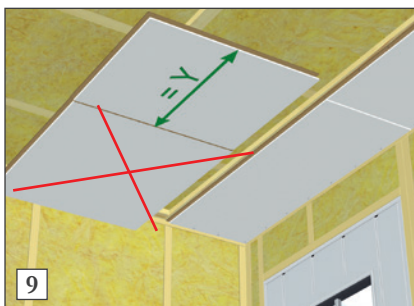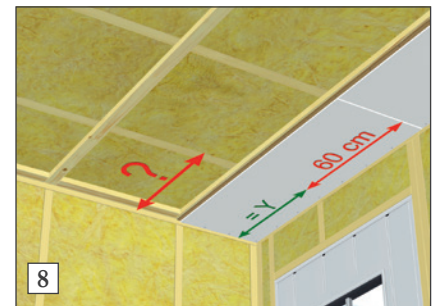

9) Measure and mark the 1st panel in the 2nd row. The excess part is cut off. When cutting with circular saw, the painted side should face down.




10) Mount the rest of the panel. Your new ceiling is done!



11) You may mount recessed down lights in all our ceiling panels. You can also install our panels in wet rooms, provided normal ceiling height and good ventilation is available. (For down-lights, see NBI 543.615).


PRODUCT RANGE

SINGLE PANEL BOARD




SYMFONI (WOOD)
PRE PAINTED

SKYGGE PROFILE




Hvít



SKYGGE
BRUSH PAINTED


SKYGGE PROFILE



Brilliant
Hvít



Hvít



FAS
BRUSH PAINTED

V-FAS PROFILE



Hvít



RUSTIKK
LASERT

**LONG SIDE EXTENTION
IN RUSTIKK PROFILE**



Lindesnes



Færder



Lillesand



Saltdal



Svalbard

WALL PANEL



SKYGGE
BRUSH PAINTED 5 BORD

SKYGGE PROFILE



Brilliant
Hvít



Mist



Soft
Menthol



Soft
Eucalyptus



Deep
Ocean



White



Pepper



Earth



Sand




Caffelatte



Frost



Kvelds-
himmel



PERLE
BRUSH PAINTED 5 BORD

PERLE PROFILE



Brilliant
Hvít




Hvít



Caffelatte



Frost



MIKROFUGE
BRUSH PAINTED

MIKROFUGE PROFILE



Brilliant
Hvít



Hvít



Frost




Mist



Earth



Sand



ANTIKK
PRE PAINTED

V-FAS PROFILE




Hvít



**HUNTONIT
PRO WALL**
PRIMED WHITE

PROFILE



FAS 3 BORD
BRUSH PAINTED

V-FAS PROFILE



Hvít
Brush painted



Earth
Brush painted



Hvít
Pre painted



FAS 6 BORD
BRUSH PAINTED

V-FAS PROFILE



Hvít



Mist



Alladin




Pilaster
blå



Kvelds-
himmel



Dempet
sort



smartpanel
PREPAINTED PANEL

PROFILE



Sand



Skog-
grønn



Paulus Blå



Organic
Red



Bomull



Betong



Brilliant
Hvít

PRODUCT RANGE

CEILING




ANTIKK TAK
PRE PAINTED

V-FAS PROFILE



Hvit



BRILLIANT
BRUSH PAINTED

V-FAS PROFILE



Brilliant
Hvit

CEILING



SYMFONI

BRUSH PAINTED
LIGHT WOODEN
STRUCTURE


LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE



Hvit



Brilliant
Hvit




PLANKETT

PRE PAINTED
WOODEN STRUCTURE

LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE



Hvit



CLASSIQUE

BRUSH PAINTED
STRUCTURE

LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE



Hvit

BRANNIT AND PLAIN WALL PANELS



BRANNIT

BRUSH FIRE RETARDANT PAINTED

MIKROFUGE PROFILE



Hvit



STANDARD VEGGPLATE

PRIMED AND UNTREATED
PUTTY JOINT



Untreated

	Net size mm	Gross size mm	Prod nr
Untreated	03 x 1200 x 2440	03 x 1220 x 2440	118505
Untreated	06 x 1200 x 2440	06 x 1220 x 2440	118605

Net measurements must be used when calculating consumption.

Huntonit AS
Pb 21, 4701 Vennesla
NORWAY

Tel: +47 38 13 71 00
Fax: +47 38 13 71 01
E-mail: byggma@byggma.no
www.byggmagroup.com
www.huntonit.com

